


## DESCRIPTION

FAT-8A fiber access termination box is able to hold up to 8 subscribers. It is used as a termination point for the feeder cable to connect with drop cable in FTTH network system. It integrates fiber splicing, splitting, distribution, storage and cable connection in one solid protection box.

## FEATURE

- Water-proof design with IP-66 Protection level.
- Integrated with splice cassette and cable management rods.
- Manage fibers in a reasonable fiber radius condition.
- Easy to maintain and extend the capacity.
- Fiber bend radius control more than 40mm.
- Suitable for the fusion splice or mechanical splice.
- 1\*8 Splitter can be installed as an option.
- Efficient cable management.
- 8 ports cable entrance for drop cable.

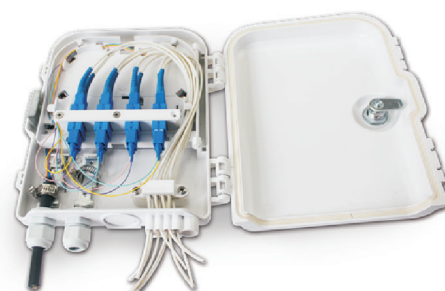

## TECHNICAL SPECIFICATION

Model	FDB0208H
Dimension (W*D*H)	240*195*66mm
Max.Capacity	8 core(single fiber)
Cable ports	2 cable glands or rubber seal
Cable diameter	In: $\phi$ 16mm; out: 2*3mm
Splitter quantity	1x8 steel tube
Adapter quantity	8SC
Color	White

