


FDB0216A FIBER OPTIC SPLITTER BOX

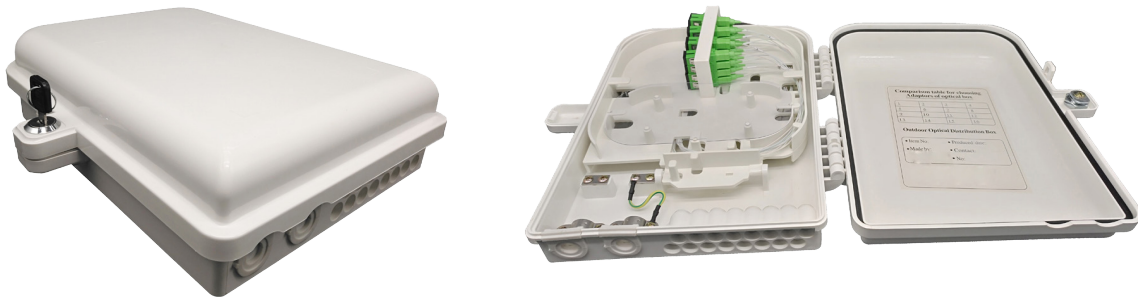

This series is suitable for jointing fiber cable and pigtail, and it protects fiber optic splices and helps to distribute.

The termination box is either a wall mounting or desktop type, which is mainly used in telecommunication equipment room and network equipment room.

FEATURE

- Be made of high impact engineering plastic.
- Small size, light weight, pleasing in appearance
- Can use max. 1x16 micro module PLC splitter.
- Anti-UV, Ultra violet resistant and rainfall resistant.
- Indoor and outdoor wall mount or pole mount
- 2inlet ports, 16outlet ports.
- Suitable for SC, LC adapters

TECHNICAL SPECIFICATION

Model	FDB0216A
Dimension(W*-D*H)mm	360*260*90
Max. Capacity	PLC 1:16(1pc); PLC 1:8(2pc)
Cable ports	2inputs, 16outputs
Cable diameter(mm)	In:16, out:2*3

