




FIELD ASSEMBLY CONNECTOR

CAIMAN



PRODUCT DESCRIPTION

- ◆Factory-installed fiber stub, no epoxy and polishing required, inside with index-matching gel
- ◆Product Length: 60mm
- ◆Cable: 3.0*2.0mm, 2.0*1.6mm Drop Cable
- ◆ Fiber: G657A1, G657A2, G657B3, Fiber Diameter 125µm, Coating Diameter 250µm
- ◆Operating Temperature: -10°C~+60°C
- ◆Application: FTTH

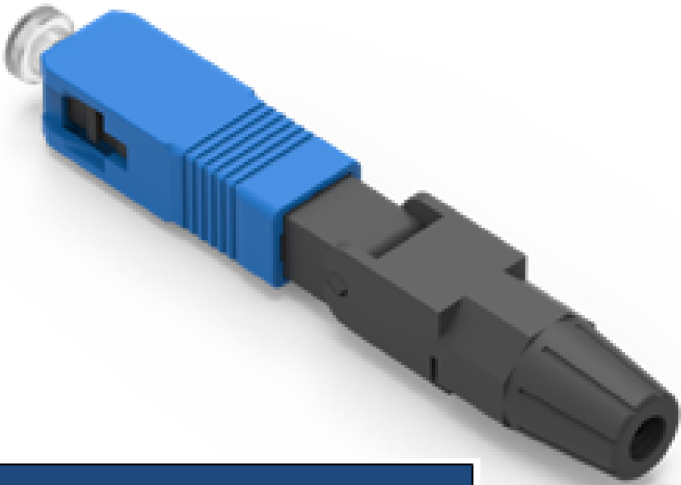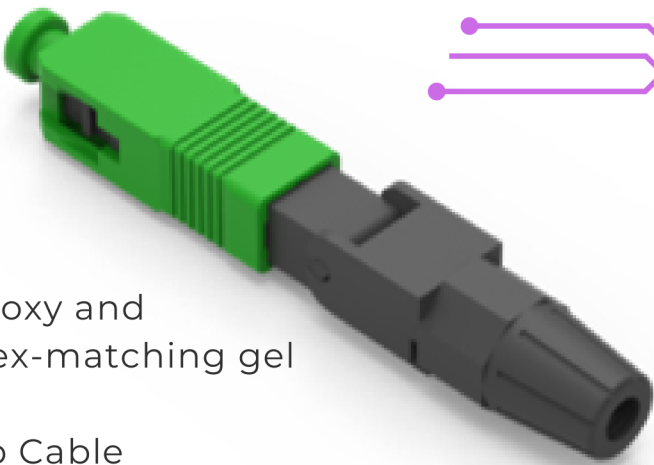

PERFORMANCE

Performance			
Item	Parameter	Item	Parameter
Insert Loss	AVG≤0.3dB, MAX≤0.5dB	Return Loss	SM: UPC≥45dB, APC≥50dB
Tensile Strength	≥30N	Mechanical Endurance	500 Times
Repeat Assembly	≥3 Times	Assembly Time	≤2mins

