


# FO OVAL 4-12 FIBRAS

GJXJHB

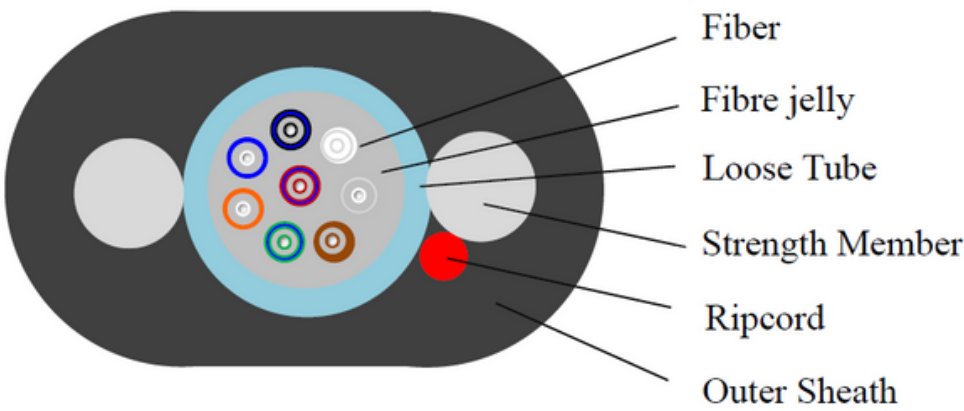

## CABLE PARAMETERS

Items		Specifications
Fiber Count		4C/6C/8C/12C G657A2
Colored Coating Fiber	Dimension	250μm±15μm
	Color	Blue、Orange、Green、Brown、Gray、White 、Red、Black
Loose Tube	Dimension	2.8±0.1mm
	Material	PBT
	Color	Blue
Strength Member	Material	FRP
	Dimension	1.2mm*2
Outer Sheath	Dimension	(4.0±0.3)*(7.0±0.3)mm
	Material	PE
	Color	Black

Color-coding of fiber will be clearly, and not fade in temperature of working and installation.

No.	Characteristics		Parameter value
1	Tensile Strength	Short Term	500N
		Long Term	200N
2	Crush Resistance strength (N/100mm)	Short Term	1000N
		Long Term	300N
3	Min. Bending Radius (mm)	Dynamic	20D
		Static	10D
4	Temperature range		-40~+60℃



## CABLE MARKING

Unless otherwise required the sheath will be marked at intervals of 1m, containing:

- (a) Indication in meters
- (b) Quantity and type of fibers
- (c) Factory name
- (d) Date of manufacturing (year)
- (e) Other requirements

The marks will be permanent and legible for the duration of the cable life.

## PACKAGING & DELIVERY

All cables will be delivered on drums with protection of both ends of the cable. Each drum will be a waterproof mark according to requirements.

Normal cable length: 2~3 km, or as per the customer's requirement

Production duration: 20working days