


SPLITTER PLC DESB - SINGLE MODE

CON/FUS

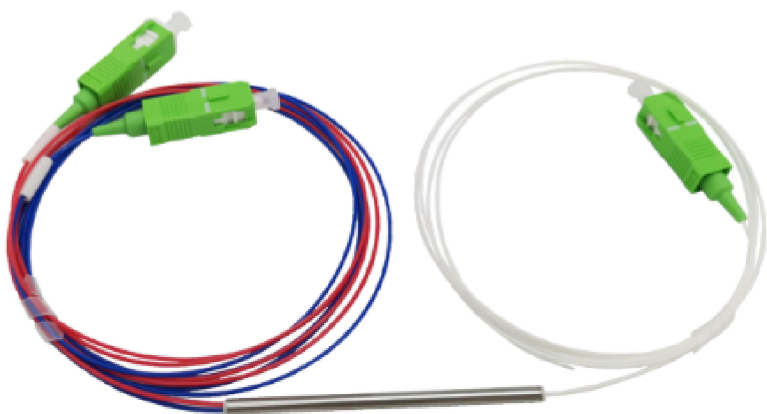

DESCRIPTION & VIEWS

Single mode Coupler 1x2, 2x2 offer very low insertion loss, low polarization dependence and excellent environmental stability. Accurate coupling ratio from 50/50 to 1/99, fiber type 250um bare fiber, 3mm and 900um loose tube fiber are available with very tight uniformity in a wide wavelength. It is applicable to perform power splitting and monitoring functions in all kinds of optical communication systems.

FEATURES

- Low excess loss
- Customized packaging available
- Environmentally stable
- High return loss
- Low PDL



APPLICATION

CATV, LAN,
FTTH Access Network
Telecom, optic fiber
communication system
Monitoring system
Optic fiber sensor
Testing device

